


Products 品名	Ceramic Fiber Blanket 陶瓷纤维毯				
Style 型号	4220C	4220ST	4220HP	4220HA	4220HZ
Qualifier Temp. °C 分类温度	1050	1260	1260	1360	1430
Working Temp. °C 工作温度	<1000	1050	1100	1200	1350
Density (kg/m3) 密度	96/128	96/128	96/128	96/128	96/128
Thickness (mm) 厚度	6-60				
Width (mm) 宽度	610-1220				
Length (m) 长度	3600, 7200, 14400 或根据客户要求定制 Other size can be customized				



Products 品名	Ceramic Fiber Board 机制陶瓷纤维板				
Style 型号	4110COM	4110STD	4110HP	4110HA	4110HZ
Qualifier Temp. °C 分类温度	1100	1260	1260	1360	1430
Working Temp. °C 工作温度	<1000	1000	1100	1200	1350
Density (kg/m3) 密度	250-350				
Thickness (mm) 厚度	3-100				
Width (mm) 宽度	600x400, 600x900, 600x1200, 1000x1200, 1200x1200 can be polished (one side or two sides) 可以抛光 (单面抛光或者双面抛光)				
Length (m) 长度					




Products 品名	Ceramic Fiber Paper 陶纤纤维纸			
Style 型号	4210ST	4210HP	4210HA	4210HZ
Qualifier Temp. °C 分类温度	1260	1260	1350	1430
Working Temp. °C 工作温度	800	1050	1200	1400
Density (kg/m3) 密度	200±10			
Thickness (mm) 厚度	1-10			
Width (mm) 宽度	610 / 1220			
Length (m) 长度	60000/40000/30000/20000/15000/12000			



Product 品名	Custom Machined Ceramic Products 陶瓷纤维异形件
Style 型号	4600
Working Temp. °C 工作温度	1000-1400
Density (kg/m3) 密度	200-500

Standard and non-standard sizes, machined parts, tubes, rods and sheets are all available upon customers request  
陶瓷纤维增加工件、套管、棒和板的标准件或非标准件都可以根据客户要求定制。



Max Temp. °C  
最高工作温度  
600°C-980°C

#### Basalt Fiber Yarn 玄武岩纱线

STYLE 型号	PRODUCT 产品	Diameter 直径	Yarn Tex
SP3730Y	Texturized Basalt Fiber Yarn 膨体玄武岩纱线	9µm-13µm	400tex-5000tex



#### Basalt Fiber Products 玄武岩产品

STYLE 型号	PRODUCTS 产品	Thickness × Width 厚度 × 宽度	Weave 纹路
SP3750	Texturized Basalt Fiber Fabric 玄武岩膨体布	(1.5MM-6MM) × (1M-2M)	Plain or Twill 平纹或斜纹
SP3760	Texturized Basalt Fiber Tape 玄武岩膨体带	(1.5MM-6MM) × (15MM-200MM)	Plain or Twill 平纹或斜纹
SP3740S	Texturized Basalt Square Rope 玄武岩方绳	3MM-50MM	----
SP3740R	Texturized Basalt Round Rope 玄武岩圆绳	3MM-50MM	----



#### Carbon Cloth 碳纤维布

Style 型号	Products 品名	Thickness 厚度	Width 宽度	Length 长度	Weave 纹路	Working Temp 工作温度
SP9000	Carbon Cloth 碳纤维布	1.6MM, 2MM	1000MM	25M, 30M, 50M, 或根据客户要求 or as per customer request	Plain 平纹	500°C

### General Introduction

Tenglong Sealing and Thermal Insulation Products Manufactory Established in 1979, is a leading manufacturer and supplier of many styles of high-grade and top quality Gland Packings, Ceramic Fiber Products, Fiber Glass Products, Graphite Products, PTFE Products, Sealing Gaskets and Sheets.

Tenglong Sealing serves oil factories, gas factories, steel mills, marine and construction industry, food industry.

Tenglong Sealing has won the leading position in domestic and world-wide market. 85% of our products are exporting to Europe, South America, Australia, Africa, Middle East, other Asia region with more than fifty countries and regions.

Advantage:  
Modern Production Line  
Imported Advanced Facility  
Professional Manufacturing Technique  
Quality Control: ISO9001:2008

Subsidiary Corporation:  
Sunpass International Co., Ltd  
Echo Industry Limited

Branch:  
Shanghai Branch  
Floor 12, No. 580 Nanjing West Road, Jing'an District, Zhongyi Building, Shanghai, 200041, China  
chelsea@sealings.cn



Agents:  
Europe, Southeast Asia, UAE, Saudi Arabia  
Welcome more companies to join Tenglong Sealing!



TENGLONG SEALING AND THERMAL INSULATION PRODUCTS MANUFACTORY  
ADDRESS: No. 78 West Road Zhenxing, Lianghui Economic Zone, Yuyao, Zhejiang, 315403, China  
Tel: 86 574 62837603  
Fax: 86 574 62837601  
Email: sales@sealings.cn  
www.sealings.cn





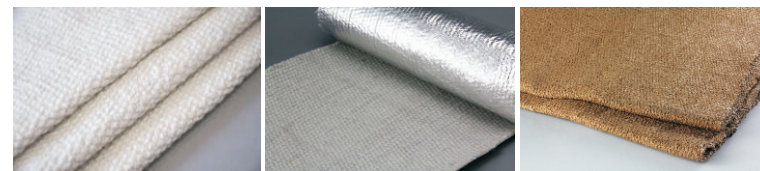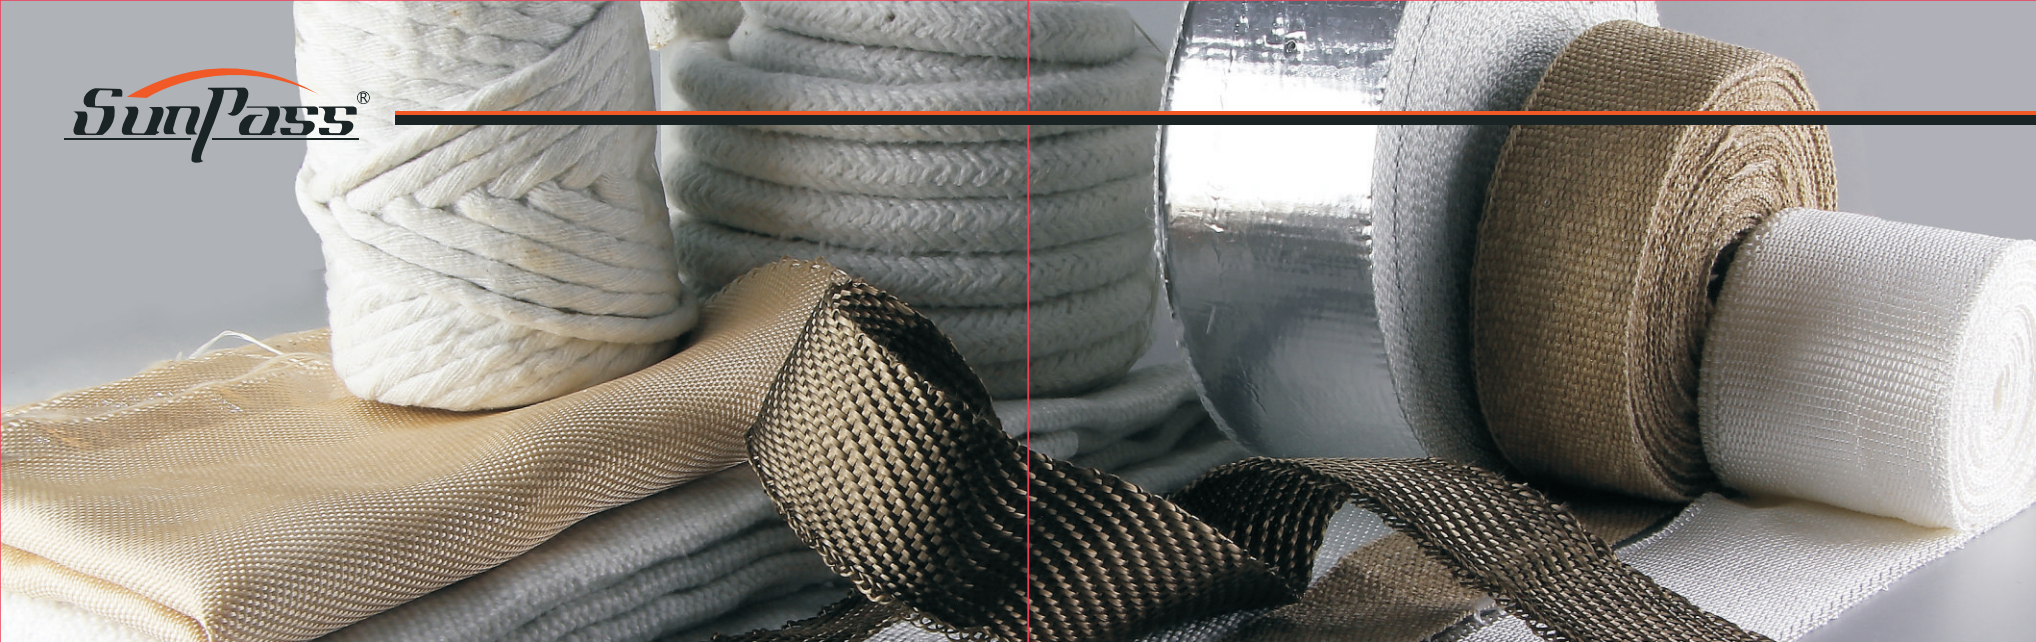

### Ceramic Fabric 陶瓷纤维布

Style 型号	Products 品名	Classification Temp. °C 分类温度	Working Temp. °C 耐温	Density (kg/m <sup>3</sup> ) 密度	Thickness (mm) 厚度	Width (mm) 宽度
4400	Ceramic Fiber Cloth Reinforced with Fiberglass 陶瓷纤维布玻璃纤维增强	1260	850	500±15	1.5-6	20-1000
4400INC	Ceramic Fiber Cloth Reinforced with S.S. Wire 陶瓷纤维布钢丝增强		1050	500±30		
4400AL	Ceramic Fiber Cloth Coated with Aluminium Foil 陶瓷纤维布覆铝箔		850	500±15		
4400INC/AL	Ceramic Fiber Cloth Reinforced with S.S. Wire & Coated with Aluminium Foil 陶瓷纤维布钢丝增强覆铝箔		1050	500±30		
4400V	Ceramic Fiber Cloth Coated with Vermiculite 陶瓷纤维布涂蛭石		1100	500±30		

Can be coated with vermiculite, graphite, aluminum or heat treated  
可以涂蛭石, 涂石墨, 覆铝箔, 或者热处理



### Ceramic Tape 陶瓷纤维带

Style 型号	Products 品名	Classification Temp. °C 分类温度	Working Temp. °C 耐温	Density (kg/m <sup>3</sup> ) 密度	Thickness (mm) 厚度	Width (mm) 宽度
4300	Ceramic Fiber Tape Reinforced with Fiberglass 陶瓷纤维带玻璃纤维增强	1260	850	500±15	1.5-6.0	20-1000
4300S	Ceramic Fiber Tape Reinforced with S.S. Wire 陶瓷纤维带钢丝增强		1050	500±30		
4300AL	Ceramic Fiber Tape Coated with Aluminium Foil 陶瓷纤维带覆铝箔		850	500±15		
4300A	Ceramic Fiber Tape Coated with Adhesive Tape 陶瓷纤维带背胶		1050	500±30		

Can be coated with vermiculite, graphite, aluminum or heat treated  
可以涂蛭石, 涂石墨, 覆铝箔, 或者热处理



### Ceramic Braided Rope 陶瓷纤维绳

Products 品名	Reinforcement 增强材料	Style 型号	Classification Temp. °C 分类温度	Working Temp. °C 耐温	Density (kg/m <sup>3</sup> ) 密度	Size (mm) 尺寸
Ceramic Braided Round Rope 陶瓷纤维圆绳	Fiberglass 玻璃纤维	4100R-FG	1260	850	800	6-100
		4100R-INC		1050		
Ceramic Braided Square Rope 陶瓷纤维方绳	Fiberglass 玻璃纤维	4100S-FG	1260	850	1200	
		4100S-INC		1050		
Ceramic Fiber Twisted Rope 陶瓷纤维扭绳	Fiberglass 玻璃纤维	4100T-FG	1260	850	400	
		4100T-INC		1050		

Can be coated with graphite or be jacketed with stainless steel wire mesh  
可以涂石墨或者外包丝网



### Ceramic Fiber Yarn 陶瓷纤维纱

Style 型号	Products 品名	Size 规格
4010FG	Ceramic Fiber Yarn Reinforced with Fiberglass 陶瓷纤维纱(玻纤增强)	425tex to 2400tex
4010SS	Ceramic Fiber Yarn Reinforced with Stainless Steel 陶瓷纤维纱(钢丝增强)	425tex to 2400tex



### Ceramic Fiber Sleeve 陶瓷纤维套管

Style 型号	Product 品名	Classification Temp. °C 分类温度	Working Temp. °C 耐温	Density (kg/m <sup>3</sup> ) 密度	Thickness (mm) 厚度	Width (mm) 宽度
4200	Ceramic Fiber Sleeve with Fiberglass 陶瓷纤维套管(玻纤增强)	1260	850	550	1.5-10	10-150
4200-SS	Ceramic Fiber Sleeve with S.S. Wire 陶瓷纤维套管(钢丝增强)		1050			



### High Silica Tape 高硅氧带

Style 型号	Silica Content 硅含量	Width (mm) 宽度	Thickness (mm) 厚度	Weight (g/m <sup>2</sup> ) 克重	Working Temp. °C 工作温度
SP-Silica/T	96%	10-100	0.25-2	200-2000	1000

可以背胶, 覆铝箔, 涂PU, 蛭石, 硅胶等  
Adhesive Tape, Aluminium Foil, PU, Vermiculite, Silicene coatings are all available.



### High Silica Fabric 高硅氧布

Style 型号	Weight (g/m <sup>2</sup> ) 克重	Thickness (mm) 厚度	Width (cm) 宽度	Weave 纹路	Silica Content % 硅含量	Working Temp. °C 工作温度
SP-Silica100 SP-Silica100W	100±10	0.1±0.05	92±1(brown) 86±1(white)	Plain 平纹	≥96%	1000
SP-Silica260 SP-Silica260W	260±20	0.26±0.05	92±1(brown) 86±1(white)	Plain 平纹	≥96%	1000
SP-Silica300 SP-Silica300W	300±20	0.30±0.05	92±1(brown) 86±1(white)	Twill 斜纹	≥96%	1000
SP-Silica600 SP-Silica600W	610±30	0.70±0.05	92±1, 100±1(brown) 86±1(white)	Satin 缎纹	≥96%	1000
SP-Silica680g SP-Silica680W	680±30	0.80±0.05	92±1, 100±1(brown) 86±1(white)	Satin 缎纹	≥96%	1000
SP-Silica880 SP-Silica880W	880±40	1.0±0.05	92±1(brown) 86±1(white)	Satin 缎纹	≥96%	1000
SP-Silica1100 SP-Silica1100W	1000±50	1.25±0.1	92±1, 100±1(brown) 86±1(white)	Satin 缎纹	≥96%	1000
SP-Silica1200 SP-Silica1200W	1250±50	1.35±0.1	92±1(brown) 86±1(white)	Satin 缎纹	≥96%	1000

可以涂PU, 蛭石, 硅胶等  
PU, Vermiculite, Silicene coatings are all available.



### Silica Fabric 中硅氧布

Style 型号	Weight (g/m <sup>2</sup> ) 克重	Thickness (mm) 厚度	Width (cm) 宽度	Weave 纹路	Silica Content % 硅含量	Working Temp. °C 工作温度
SP-Silica600RS	650±30	0.75±0.05	92±1	Satin 缎纹	70%±5%	800
SP-Silica700RS	700±30	0.85±0.1	100±2	Satin 缎纹	70%±5%	800
SP-Silica1100RS	1150±50	1.30±0.1	92±1	Satin 缎纹	70%±5%	800
SP-Silica1200RS	1250±50	1.45±0.1	100±2	Satin 缎纹	70%±5%	800

可以涂PU, 蛭石, 硅胶等  
PU, Vermiculite, Silicene coatings are all available.



### High Silica Sleeve 高硅氧套管

Style 型号	Inner Dia. (mm) 直径	Wall Thickness (mm) 壁厚	Silica Content % 硅含量	Unit Weight (g/m) 单位长度质量	Working Temp. °C 工作温度	Melting Point °C 熔点
SP-Silica/S	3-100	0.1-3	≥96%	20-300	1000	1700